

Sanyo KIKI


Twin Rotary Mower

Twin Mower Series ZM-45, ZM-3709, ZM-3708 & TM-27

Capable of operating in a diverse range of areas from flat, sloping and uneven surfaces perfect for farming or industrial use, golf-courses, parks or grass cutting around suburban or country areas such as river banks or rice fields.

Easy and comfortable to operate Sanyokiki's Twin Mower Series will enable you get your work done in half the time and on half the energy.

●Mowing large areas made easy

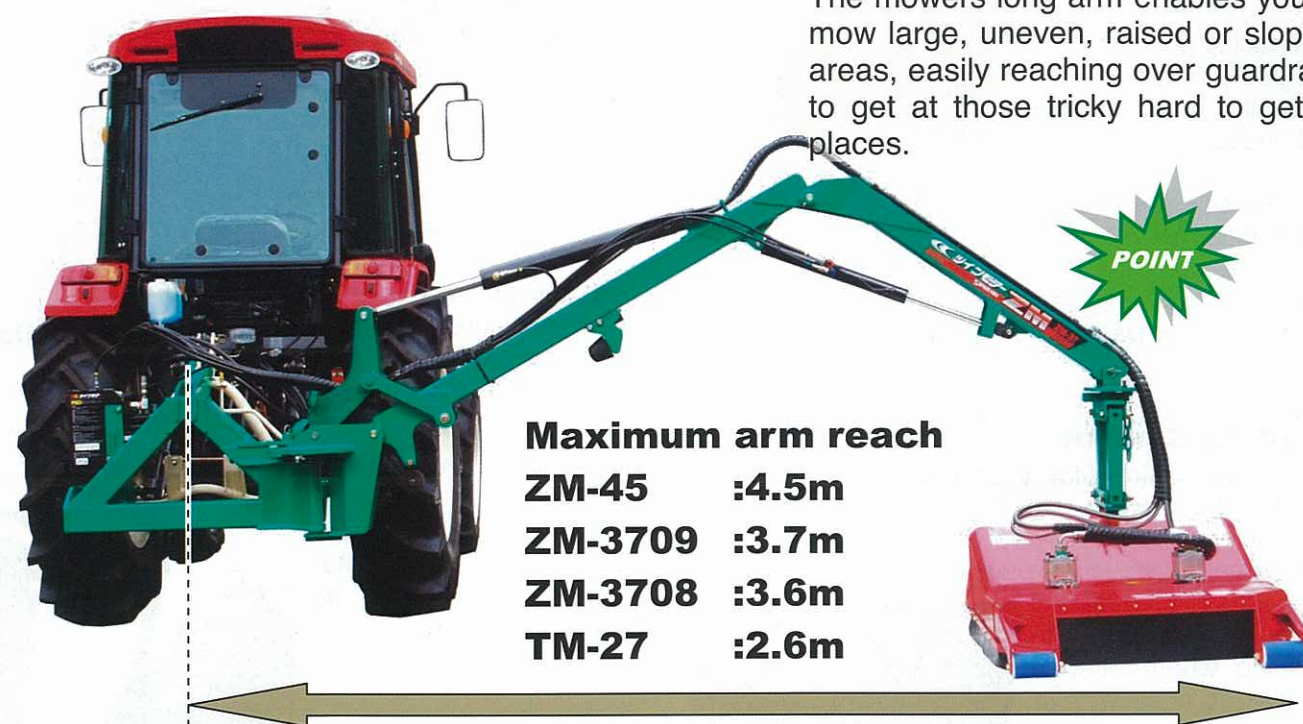


The mowers long arm enables you to mow large, uneven, raised or sloping areas, easily reaching over guardrails to get at those tricky hard to get at places.

●Retractable Arm gives you complete control


(Only ZM series and when the right rear position)

Obstacles such as telegraph poles pose no problem. From the comfort and safety of your tractor's driver seat the control lever enables you to retract and extend the mower arm at will allowing you to continue your work without leaving your tractor cabin.

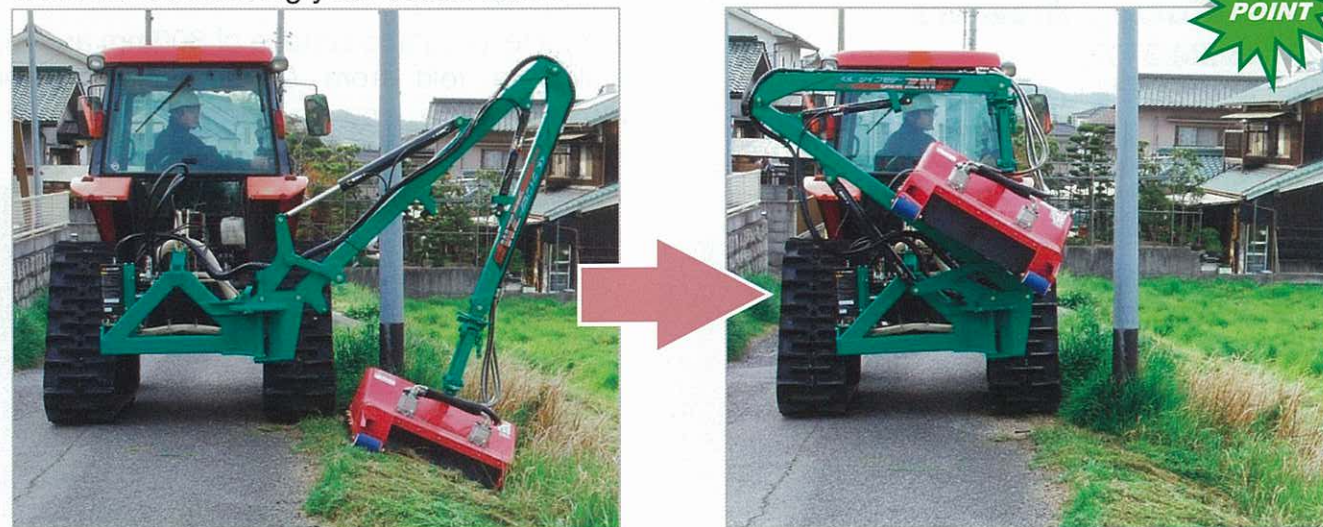


Model		TM-27
Tractors [kW] (recommended features)		14.7-36.7 (20-50PS)
Weight [kg]		165
M o w e r	Design	2plane, level plane
	Mower type	Bar blade
	Width of cut [mm]	800
	Height of cut [mm]	
	Rotor speed [rpm]	2,700
Work area per 1hour [m ² /h]		680-1,700
Working positions		
A	[mm]	2600
B	[mm]	1550
C	[mm]	1450
D	[mm]	2100
E	[mm]	1450
F	[mm]	2500

TM-27

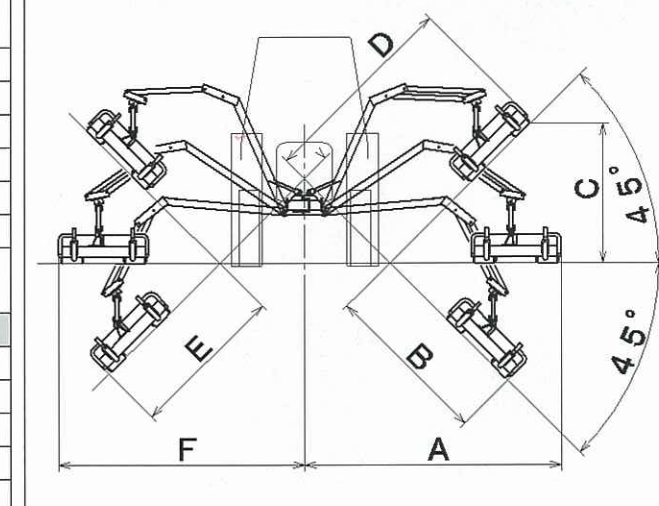

Model		ZM-3708	ZM-3709	ZM-45
Tractors [kW] (recommended features)		20.6-36.7 (28PS-)	25.7-36.7 (35PS-)	36.8-66.2 (50PS-)
Weight [kg]		340	370	379
Three point linkage [cat.]		1, 2		
M o w e r	Design	2plane, level plane	Level plane cut specialist	
	Mower type	Bar blade		
	Width of cut [mm]	800	900	
	Height of cut [mm]	30, 50, 80		
	Rotor speed [rpm]	2,700	2,300	2,360
Work area per 1hour [m²/h]		680-1,700	760-2,700	760-3,800
Working positions				
A [mm]		3600	3700	4500
B [mm]		2600	2700	3500
C [mm]		3050	2150	2650
D [mm]		2900	3000	3750
F [mm]		2750	2750	3500
G [mm]		2000	2050	2100

ZM-45/ZM-3709/ZM-3708

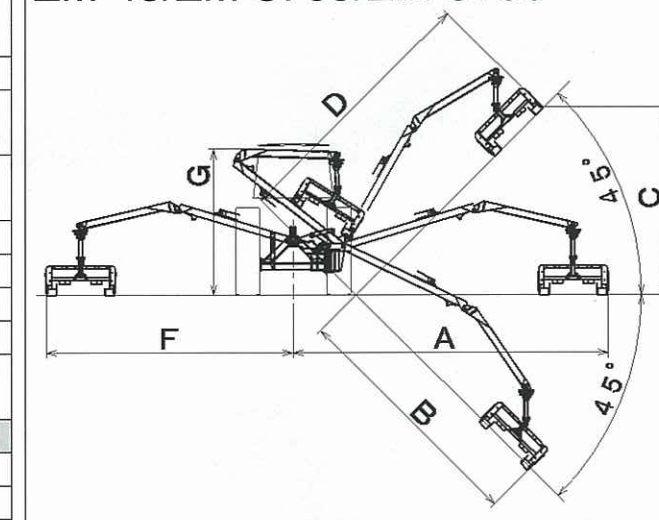

For more information, go to website at

Sanyo KIKI

SANYO KIKI CO.,LTD.

Tel. +81-(0)865-64-2871

Telefax.+81-(0)865-64-2079

3858,Shinjo,Satosho-cho,Asakuchi-gun,Okayama,719-0392 Japan

<http://www.sanyokiki.co.jp/>

E-mail san@sanyokiki.co.jp



ISO9001
JQA-QM4853

●Fine Cut Hay



The twin rotary blades slice easily through long grass and other weeds leaving only easily collectable fine cut clippings behind.



●Smooth even on bumpy ground

(ZM-45/ZM-3709/ZM-3708/TM-27)

Our floating link arm absorbs the dips and bumps allowing the mower to float over the terrain and maintain a smooth even cutting height.

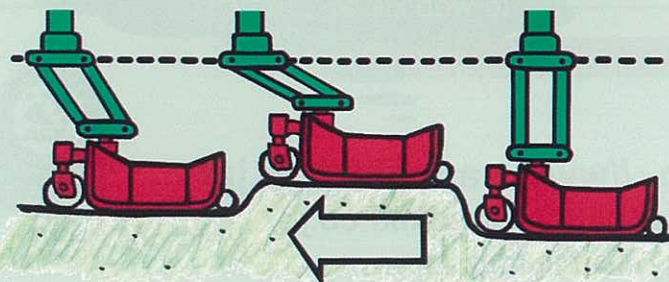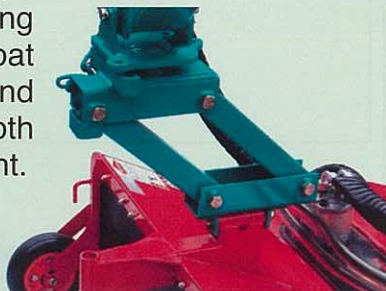

●Cutting Power

(ZM-45/ZM-3709/ZM-3708/TM-27)

Powerful 2 level adjustable 4 edged twin blades.



The ZM-45, ZM-3709, ZM-3708 models

These models can be attached to the rear of your tractor by either a three point linkage or a auto-hitch system.

4 Flexible Work Position Settings

1.Right side position

This position provides you with a clear view of the work area from the driver's seat allowing you to look out for any obstacles that may be in your path.

2.Right rear side position


This position allows you to make use of the mower arm's maximum reach.

3.Rear facing position

This position allows you to easily mow wheel track areas.

4.Left rear side position

This position allows you to operate along the left side of a road with little interference to passing traffic.

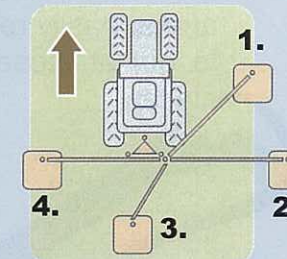

Work position

Complete Control

Our one lever control stick gives you complete control over both the mower and mower arm. The lever's light and responsive fingertip control allows you to tackle even the biggest jobs with ease. The controller box attaches magnetically allowing you to adjust the positioning where needed to suit the job at hand.



The TM-27 model

The TM-27 requires no tractor modification and can easily be attached to the front of your tractor singlehandedly. Its relaxed forward facing operating position allows you to work for long periods without tiring.

Avoid Obstacles

The parallel link allows you to easily move the mower horizontally where necessary to avoid obstacles such as trees, guard rails or rocks.

3 Flexible Work Position Settings

1.Right side position


This position allows you to make use of the mower arm's maximum reach.

2.Front facing position

This position allows you to easily mow wheel track areas.

3.Left side position

This position allows you to make use of the mower arm's maximum reach.

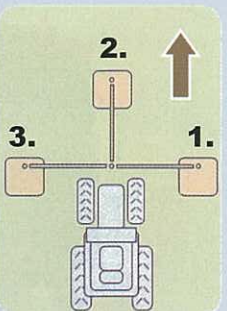

Work position

Complete Control

The light and easy to operate one lever control stick gives the operator complete control of all mower operations.



●Level plane Cut Specialist

Twin Rotary Mowers

(ZM-45/ZM-3709)

With a level cutting surface of 900mm, a high torque twin hydraulic motor and 3 wheels at the front of the mower that improve balance, stability and the mowers ability to move in a straight line.

These mowers will get the job done.



●2 Plane Bi-folding Rotary Mower

(ZM-3708/TM-27)

With a level cutting surface of 800mm and the ability to fold from 0-60 degrees these mowers allow you to mow two different planes simultaneously.

